

# PureWaterCooler™

by VERTEX

## PureChill-9501




## Cleaner. Safer. Better.

*This new Vertex 3-temp cooler offers cold, hot and room water along with the new, more reliable capacitive touch dispensing.*

The newest VERTEX **PureWaterCooler** Cold, Hot and Room temperature water dispenser uses **PureChill™** Technology to eliminate the need for an open reservoir to store water. The closed system keeps environmental contaminants out. The reliable capacitive touch control panel dispenses water safely to your cup.




# PureChill-9501



PureChill Cooling Technology




Integrated Filter Monitor



ProTekk Auto-Safety Shut-off valve

## Standard Features

- PureChill™ Technology
- Closed system keeps environmental contaminants out
- Capacitive touch dispense button for ease and durability
- Integrated Filter Monitor ensures freshly filtered water
- ProTekk™ Auto Safety-Shut-Off Valve provides peace of mind
- Cold: 37-50° F, Adjustable · Hot: 180° F, Autocontrol
- LED indicator for Hot and Cold water on the front panel
- Tall fill opening allows larger cups, mugs or reusable bottles
- Easy to clean control panel
- Individual on/off control switches for cold and hot water on rear panel
- Built-in filtration system is easily accessed for replacement
- Available with RO system or Standard Dual-Cartridge filtration system
- RO system comes with 2.5 gallon pressurized water storage tank
- Filter assembly is front door accessible
- Attractive LED lighted dispense area
- Award winning design
- 1 year limited warranty
- 3 year compressor warranty

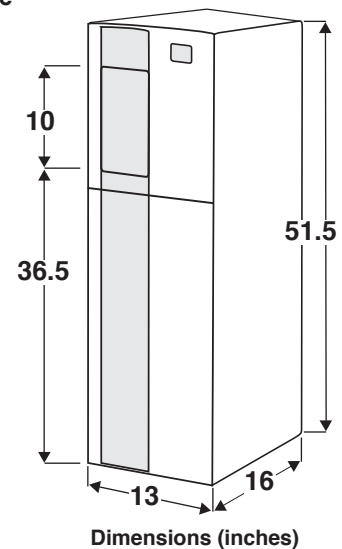

## Specifications

Shipping Weight: 81 lb.  
 Dimension: 13"W x 16"D x 51.5"H  
 Cooling Rate: 2.8 gal/hr 37-50 °F  
 Hot tank volume .5 gal  
 Heating Rate: 1.3 gal/hr 180 °F  
 Voltage: 115 VAC  
 Power Required: 600w max



## Filter System

Standard Filter **9501F**  
**Stage 1:** 5 micron Sediment  
**Stage 2:** 10 micron Activated Carbon  
 Reverse Osmosis Filter **9501R**  
 Above 2 stages plus  
**Stage 3:** 100-GPD RO Membrane  
 Automatic tank full control  
 Partial assembly required

## ORDERING

3-Temp Model with 100 GPD RO Filtration	<b>PWC-9501R*</b>
3-Temp Model with Standard Filtration	<b>PWC-9501F</b>
3-Temp Model	<b>PWC-9501</b>
Replacement Filters	Sediment <b>TF-4113</b>
	Carbon <b>TF-4115</b>
	RO membrane, 100 GPD <b>MA-4205</b>

\*Includes 2.5 gallon bladder tank for pressurized water storage